
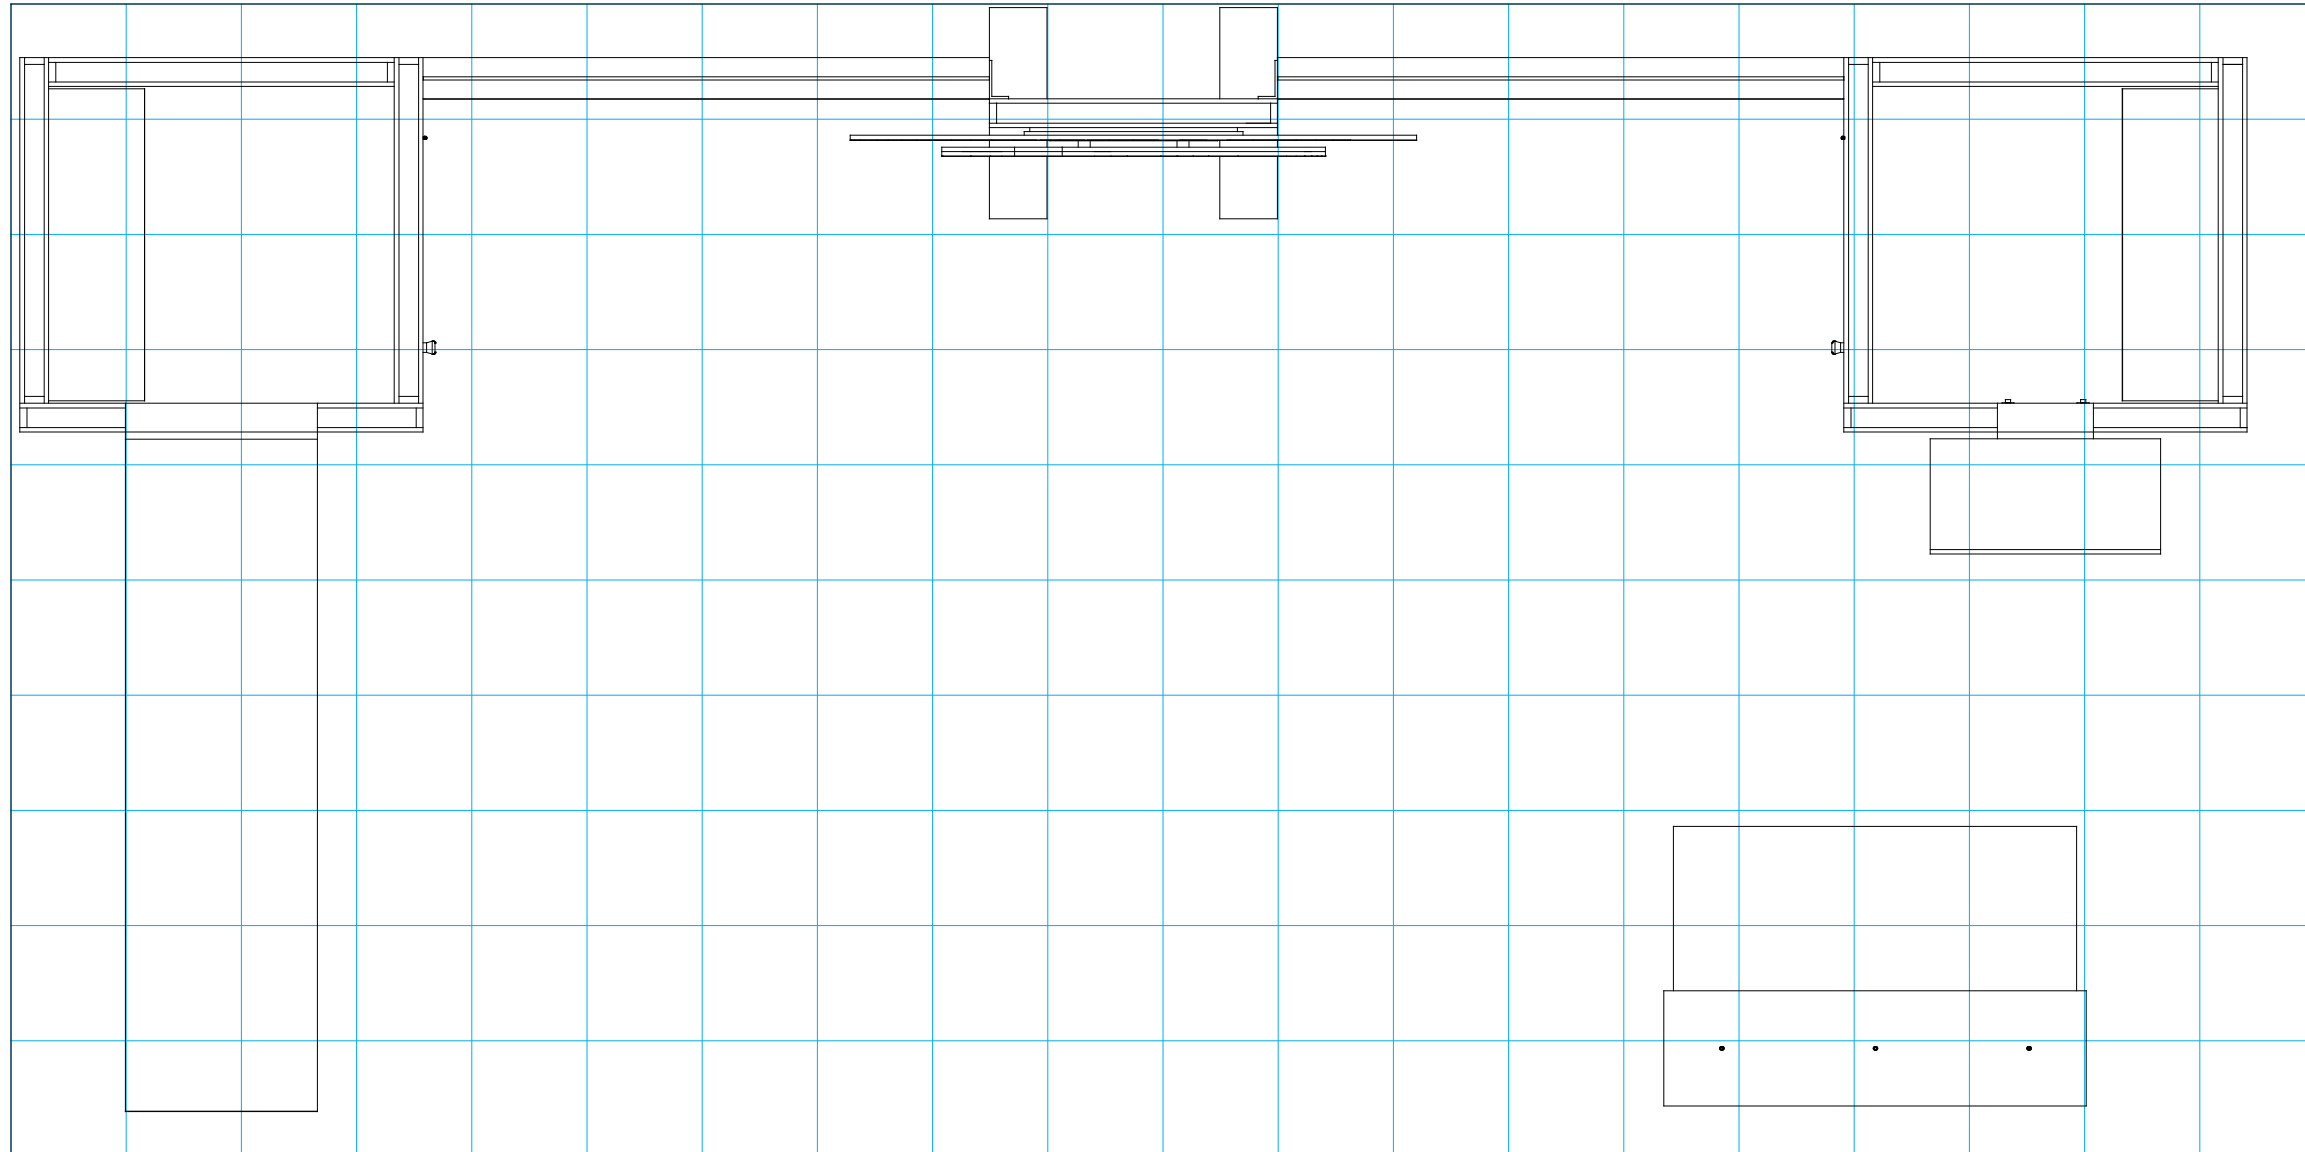


SETUP INSTRUCTIONS



General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

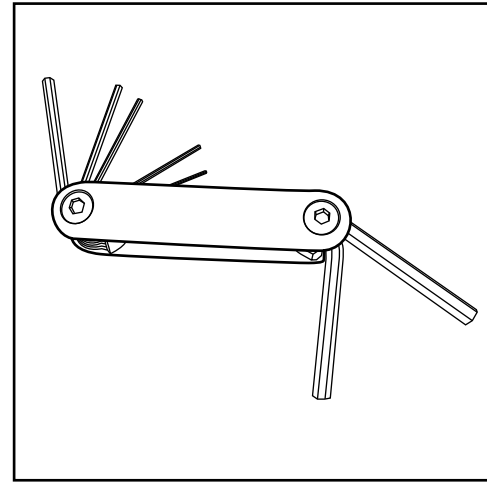


Hex Tool - Essential for Assembly

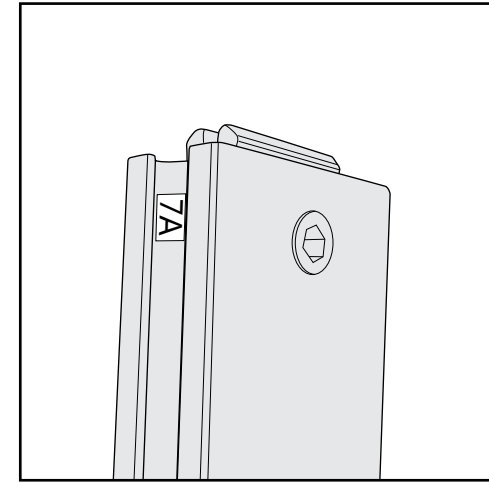


Part Identification - Numbering

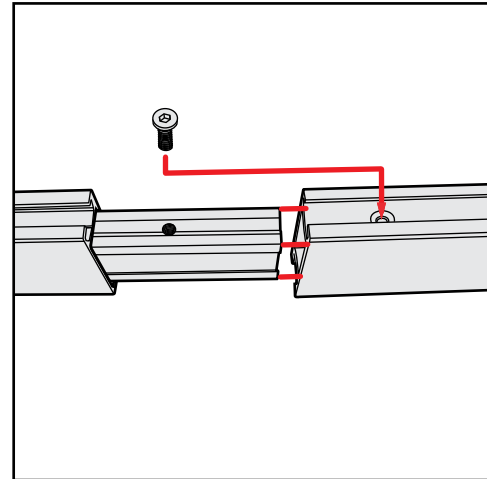


Spline Connection

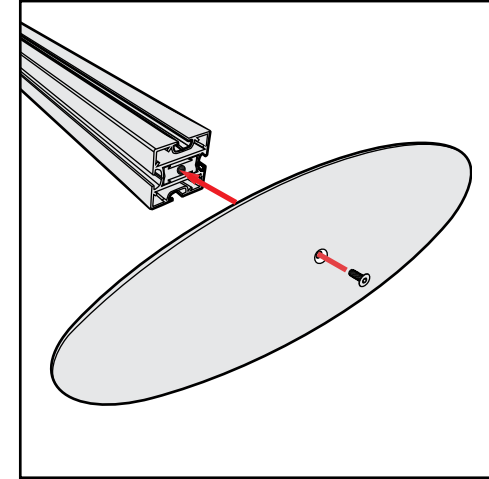

Base Plate & Extrusion Connection

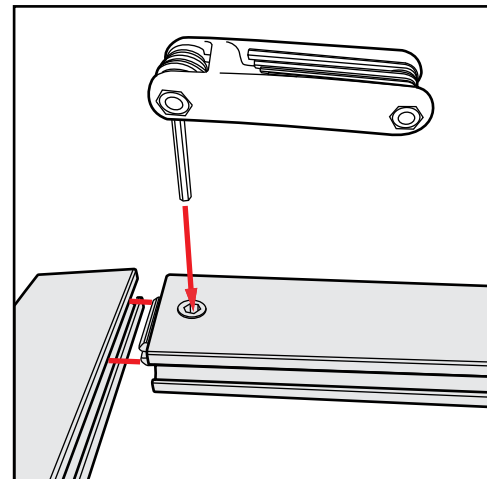

Extrusion & Lock Connection

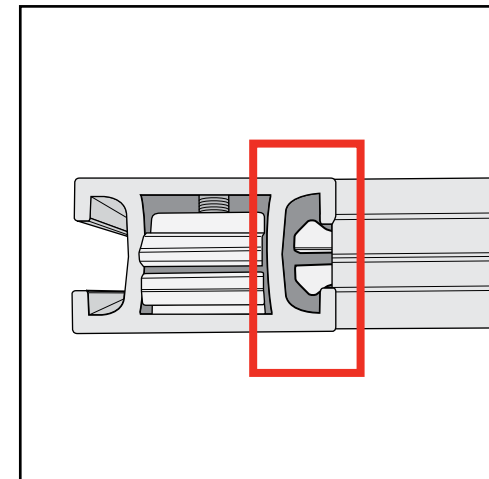

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

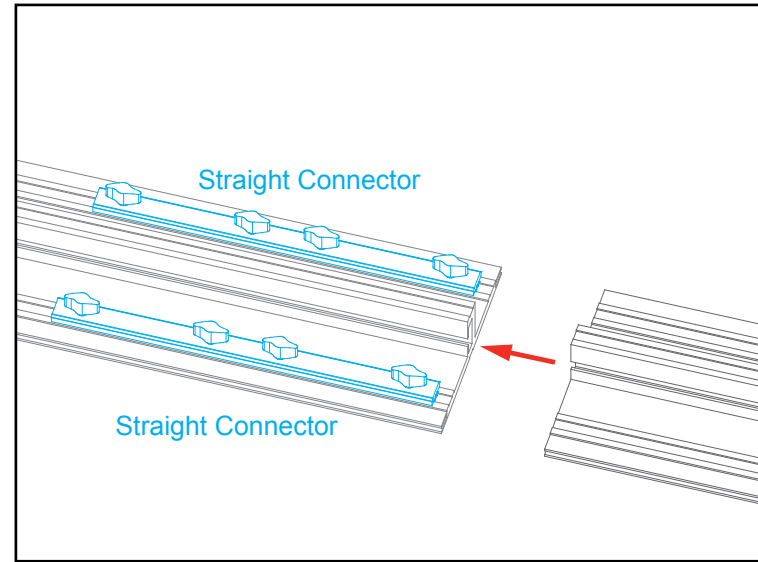

Slide both connectors across seam of extrusions. Tighten all knobs.

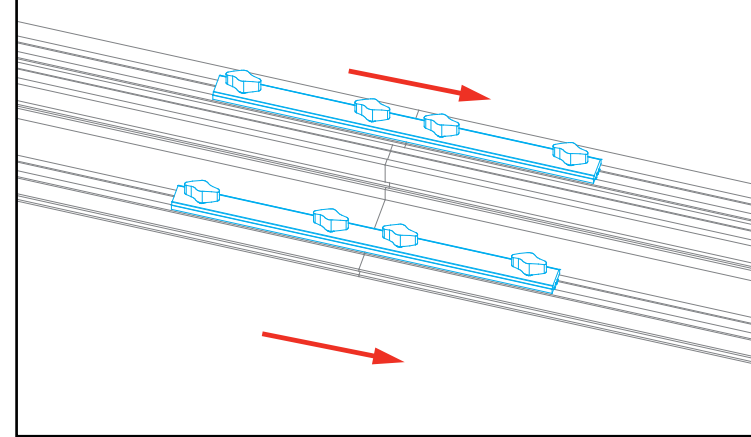

All knobs must be tightened securely to ensure a proper connection.


Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.

Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection

- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

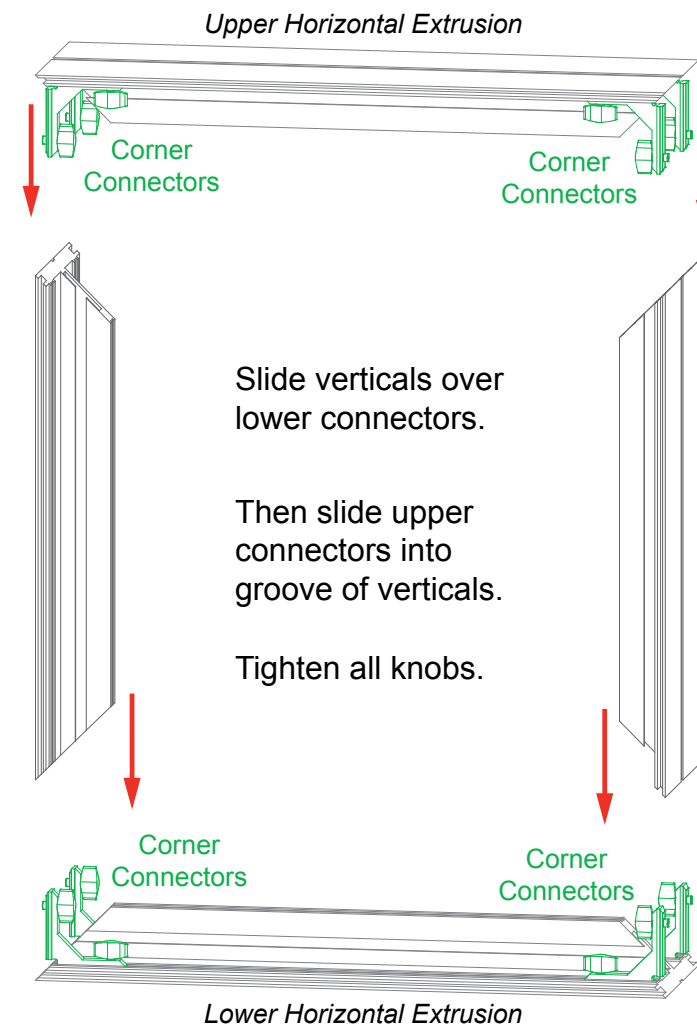


Slide verticals over lower connectors.

Then slide upper connectors into groove of verticals.

Tighten all knobs.




Adjust connectors if necessary to prevent gaps in connection.

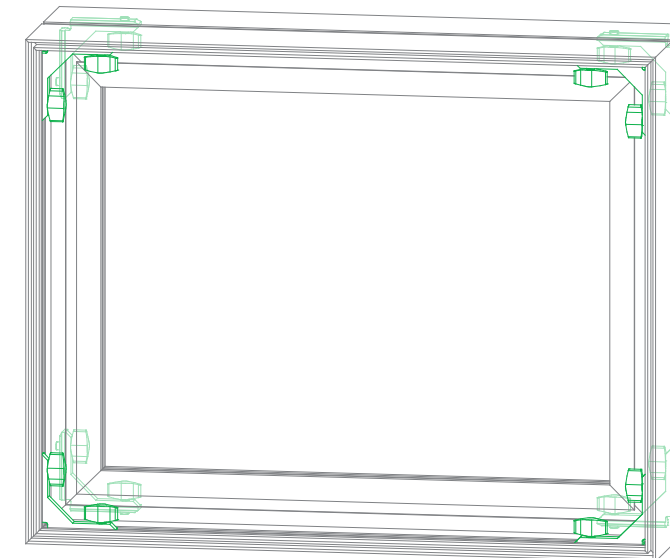

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.

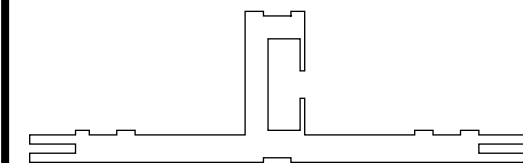


CEI152 Profile


The Perfect Fit

SEG Graphic Installation *in 3 Steps*


STEP 1: Attach Corners

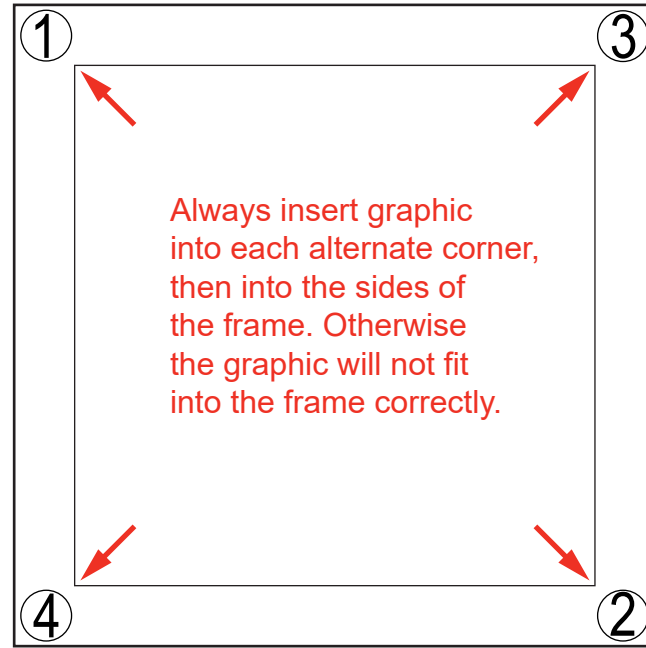

STEP 2: Attach Middle

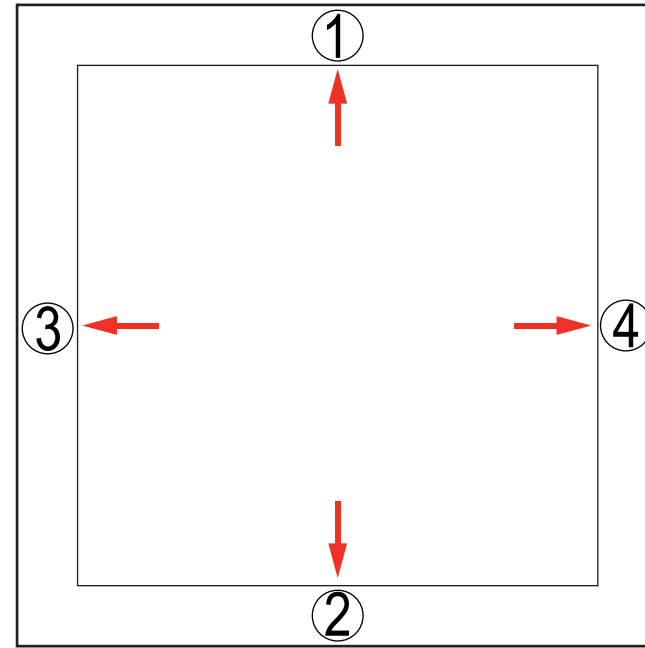

STEP 3: Attach Sides

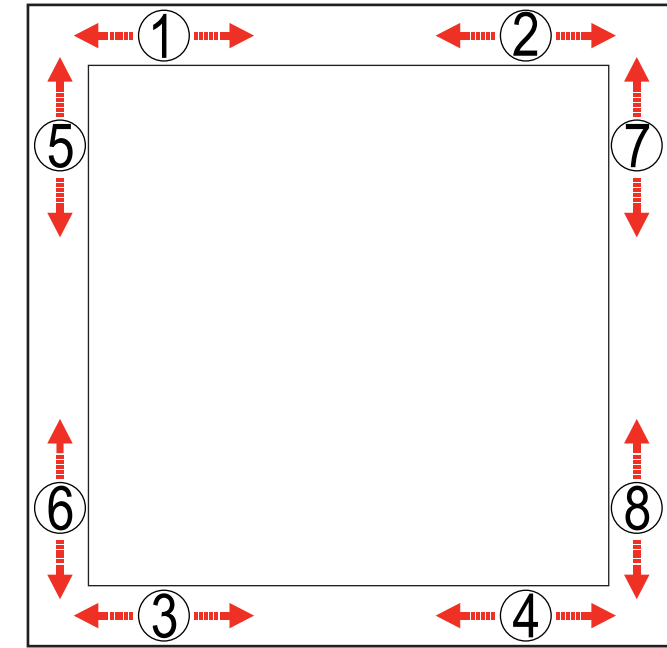

Insert narrow side of silicone welt into the channel at corner 1, with fabric to the outside.

Repeat for opposite corner 2, then corner 3, then corner 4.

Once corners are attached, press the middle of edge 1 into the channel. Then press middle of edge 2 into the channel on opposite side.

Repeat with edge 3 & 4.

Once the middle of sides are attached, fully press the silicone welt into the channel, between center and corner at location 1. Repeat the process between center and corner at location 2.

Do the same for welt on opposite side, at locations 3 & 4. Then repeat for locations 5 & 6 and 7 & 8.

Once the welt is fully inserted on all sides, smooth out edges as needed for a perfect fit.



To remove the graphic from the frame, locate the fabric **pull tab**. Gently pull on the tab to remove the graphic.


Install video:




CRATE PACKING

Item	Qty.	Description
A1	1	36" w x 95" h x 3" d Back Panel
A2	1	36" w x 95" h x 3" d Side Panel
A3	1	36" w x 95" h x 3" d Side Panel w/ Door
A4	1	42" w x 95" h x 3" d Front Panel w/ accent

Steps:
 1) Assemble panels [A1-A2-A3-A4] together as shown, using roto cam locks. See **Roto Cam Lock Connection** detail.

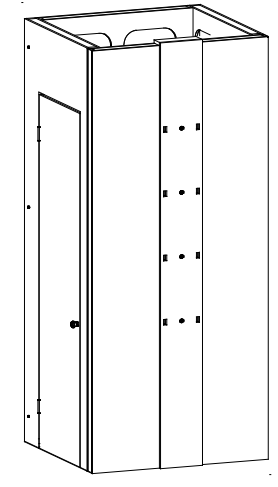


When assembled

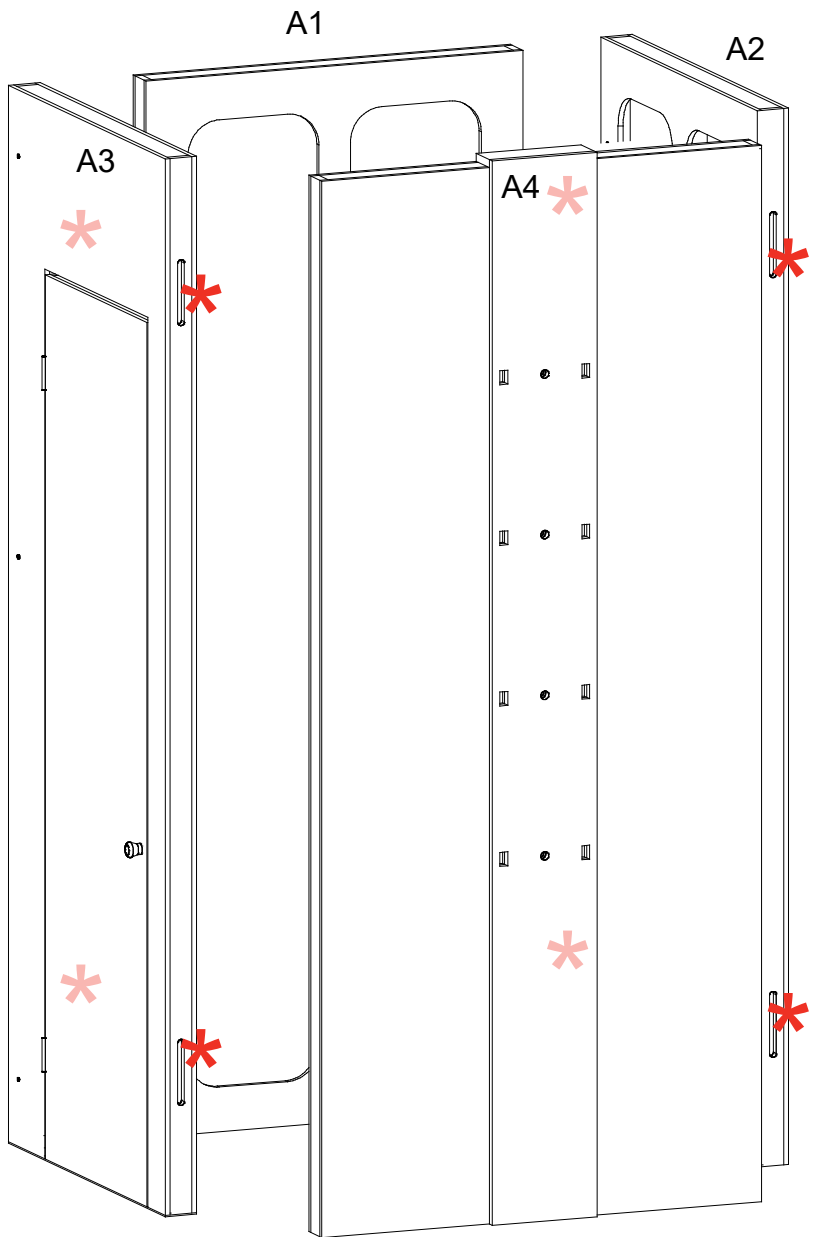


FRONT VIEW

*** Roto Cam Lock Connection**

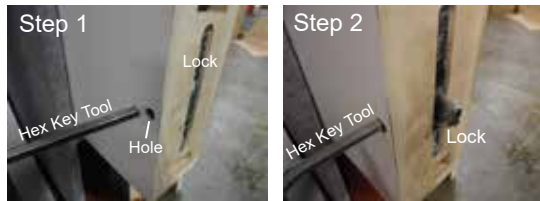




Place hex tool in hole on side of panel. Rotate to activate lock & secure panels together.

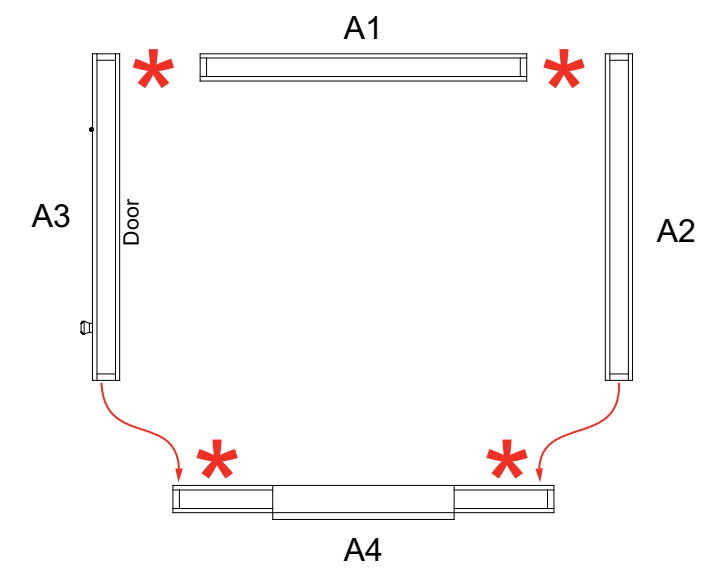

TOP VIEW

Item	Qty.	Description
F1-F5	1	24"w x 12"d Shelf w/ Z33

- Steps:
- 1) Attach Shelves [F1,F2,F3,F4,F5] to front of Panel [A4].
See [Shelf Attachment](#) detail. Run power cords for LED lights through wire management holes to power source.

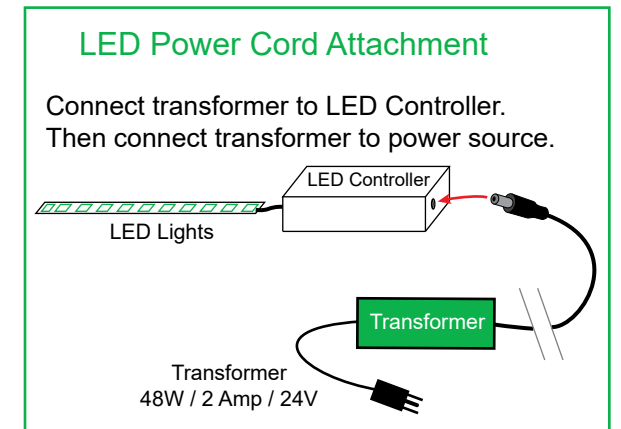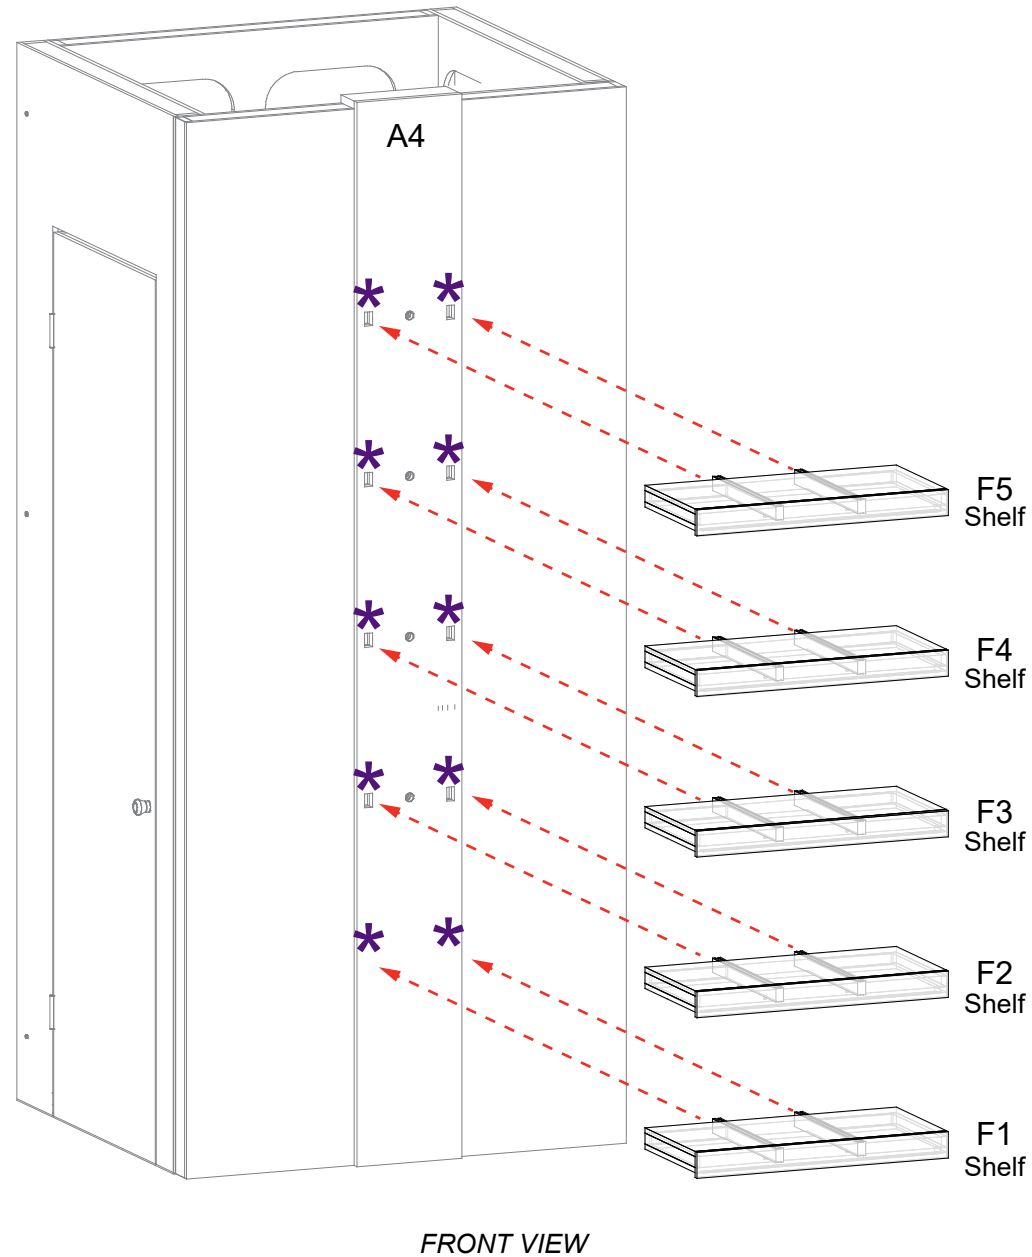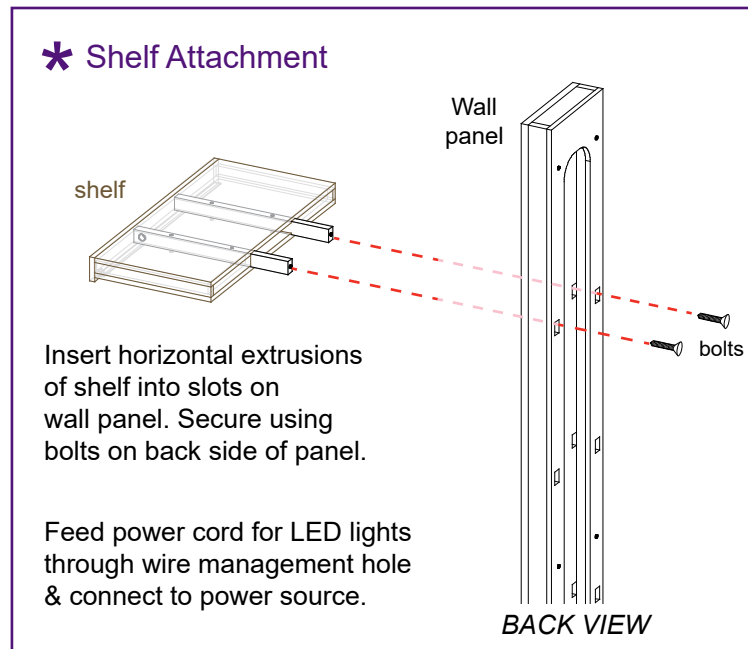




Item	Qty.	Description
1	1	95”h CEI110 Vertical Extrusion
2	1	95”h CEI110 Vertical Extrusion
3	1	59”w CEI110 Horizontal Extrusion
4	1	59”w CEI110 Horizontal Extrusion

Steps:



Refer to the CEI110 Frame Assembly general information page.

- 1) Assemble verticals [1,2] between horizontal [3,4] using **Corner Connectors**.
- 2) Connect power cords to Supernova lights as shown.

Assemble frame flat on ground.

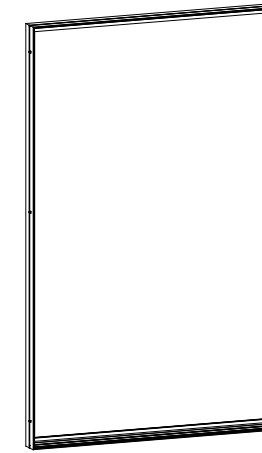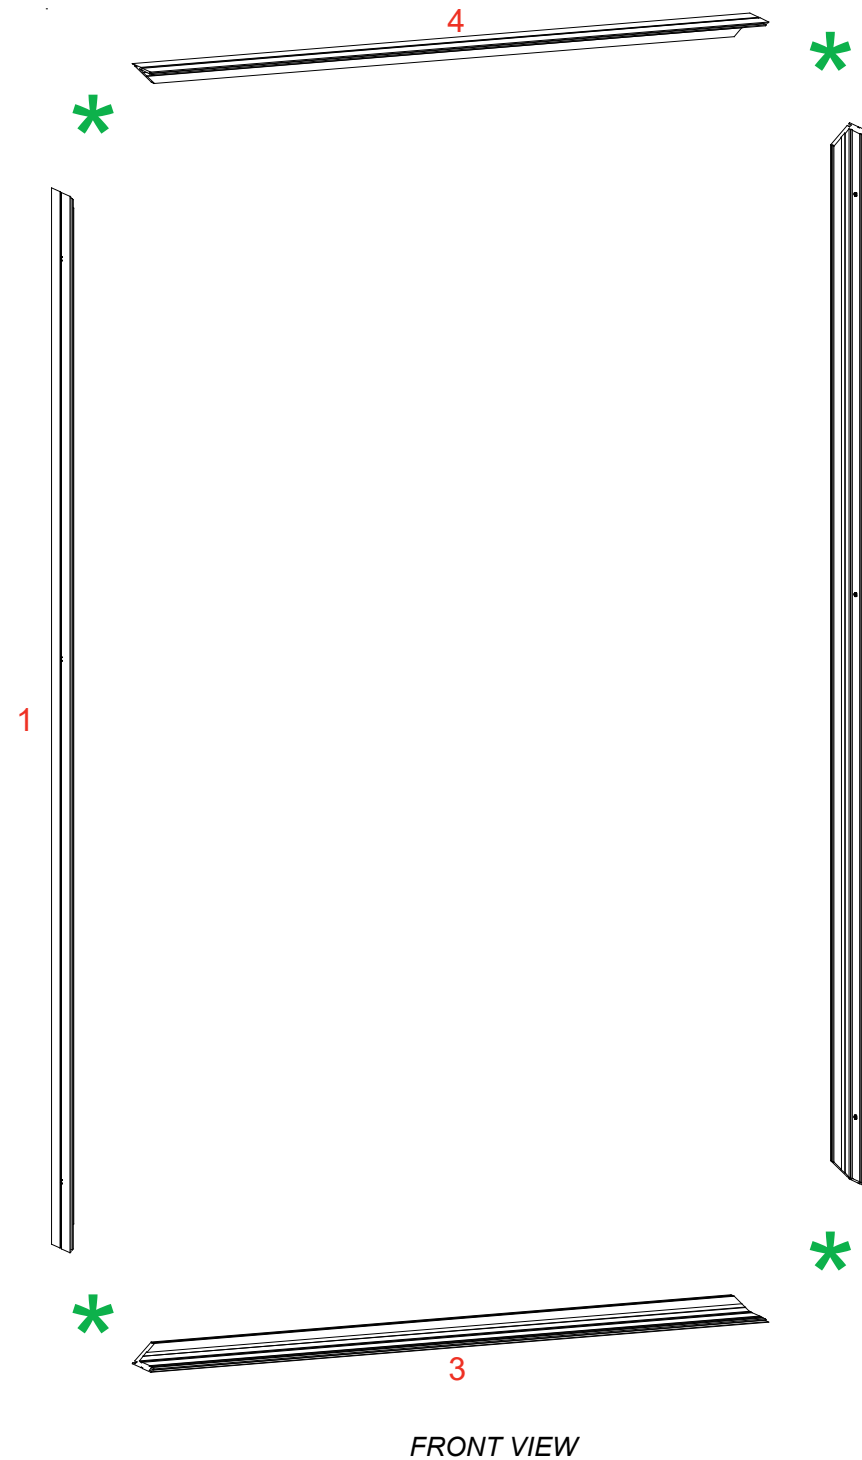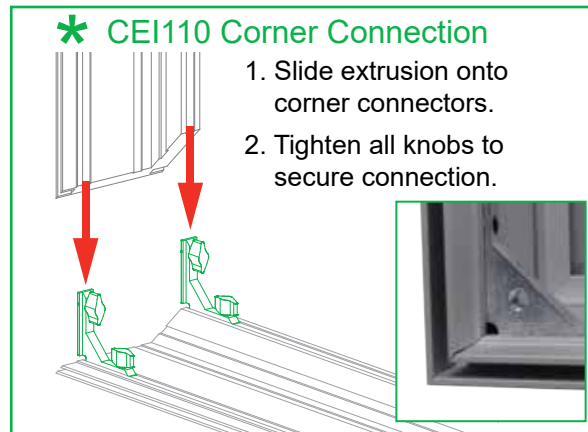


When assembled

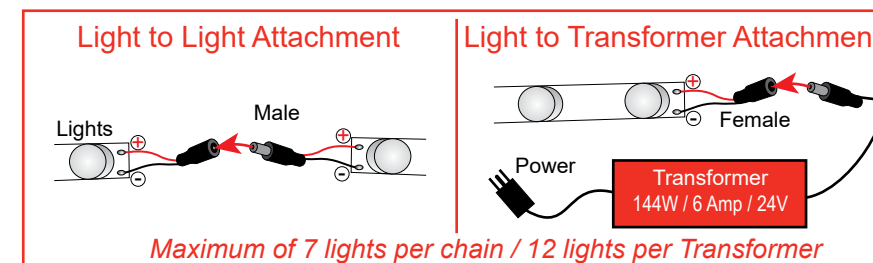
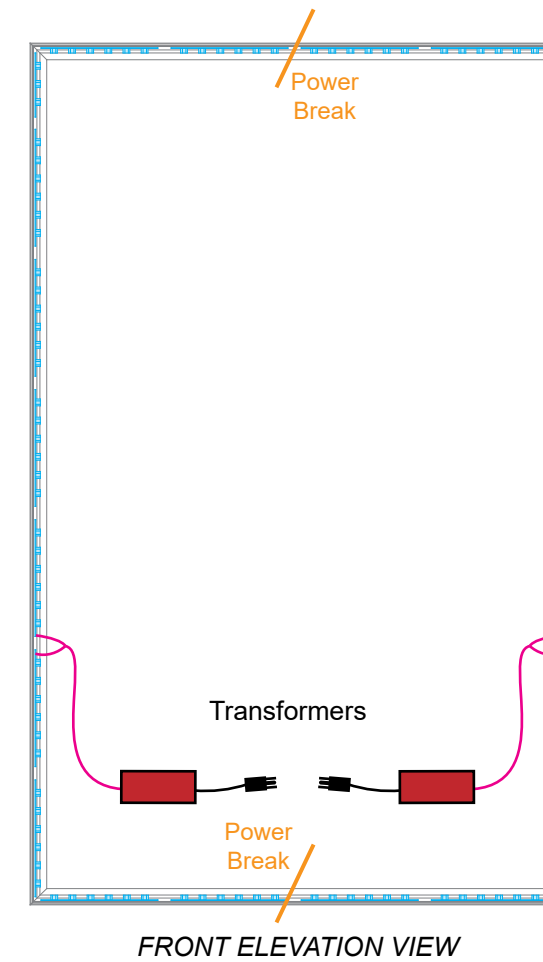


Steps:

- 1) Apply SEG graphic to front of lightbox assembly [1/2/3/4].
Refer to the SEG Installation general information page.
- 2) Connect lightbox vertical [2] to right closet panel [A3] using Bolt to T-Nut Connection.
- 3) Apply SEG Blocker to back of lightbox assembly.

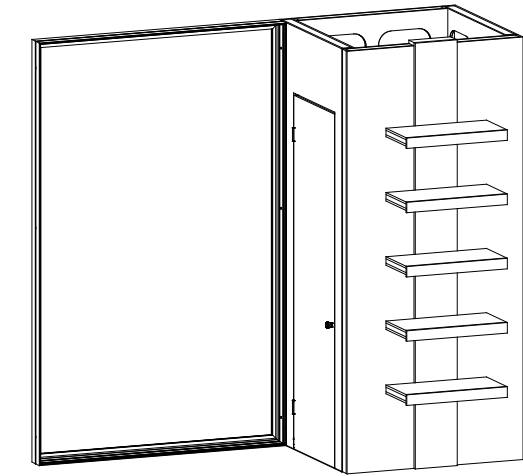


When assembled

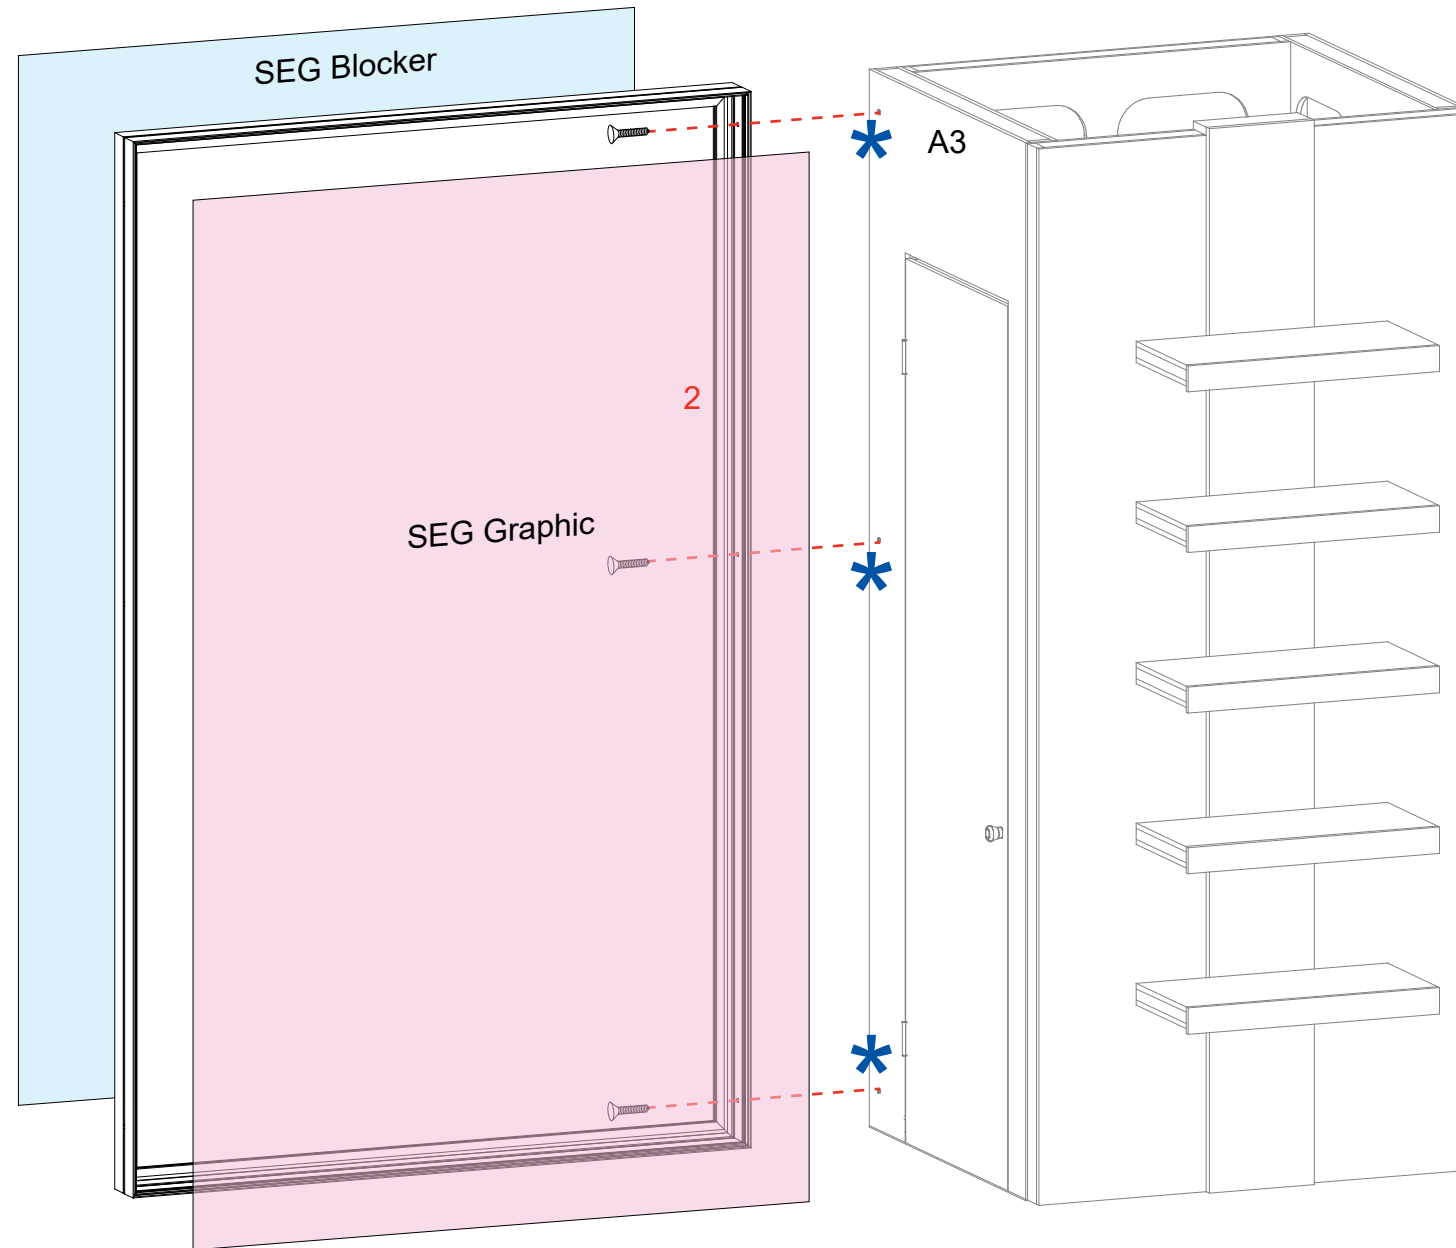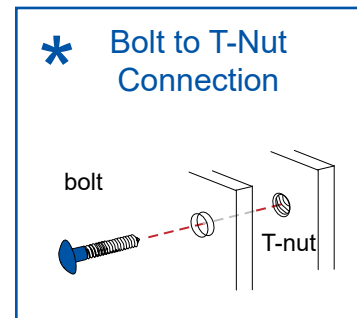

FRONT VIEW


Item	Qty.	Description
G	1	30"w x 95"h x 3"d Panel
6,7	1,1	6" x 22" SF61 Base Plate
--	3	4" x 2" x 2" custom L-Bracket

- Steps:
- 1) Connect Base Plates [6,7] to bottom of Panel [G], using bolts.
 - 2) Attach lightbox vertical [1] to Panel [G] using brackets.
- See **Bracket Attachment** detail.


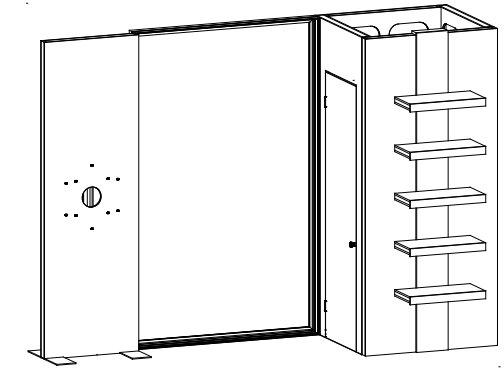


When assembled

See following pages for attachment of spinner graphic.

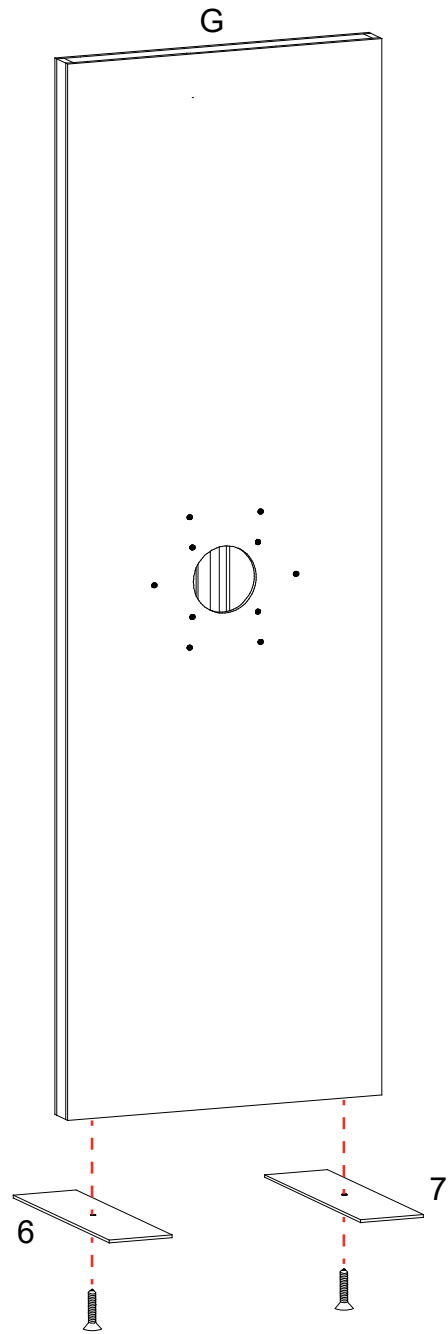


FRONT VIEW

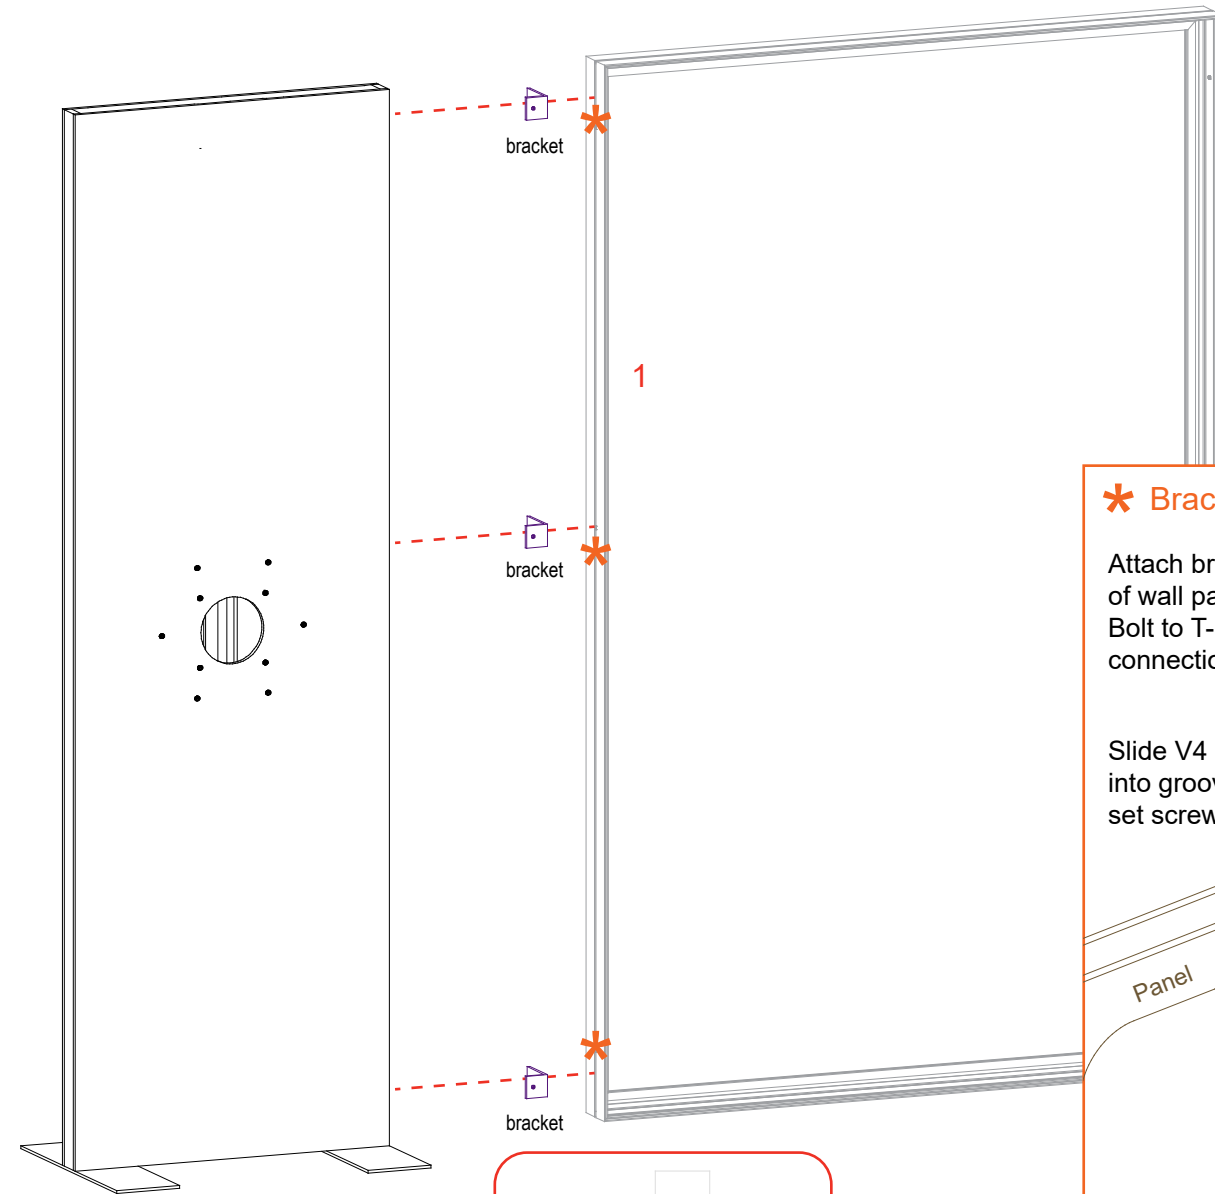


* Bracket Attachment

Attach bracket to back of wall panel using Bolt to T-Nut connection.



Slide V4 connector into groove of vertical extrusion; tighten set screw to secure V4 in place.

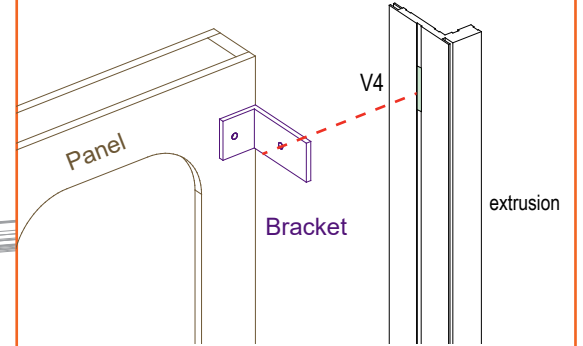

Attach bracket to vertical extrusion using bolt.




Item	Qty.	Description
1	1	95”h CEI110 Vertical Extrusion
2	1	95”h CEI110 Vertical Extrusion
3	1	59”w CEI110 Horizontal Extrusion
4	1	59”w CEI110 Horizontal Extrusion

Steps:



Refer to the CEI110 Frame Assembly general information page.

- 1) Assemble verticals [1,2] between horizontal [3,4] using **Corner Connectors**.
- 2) Connect power cords to Supernova lights as shown.

Assemble frame flat on ground.

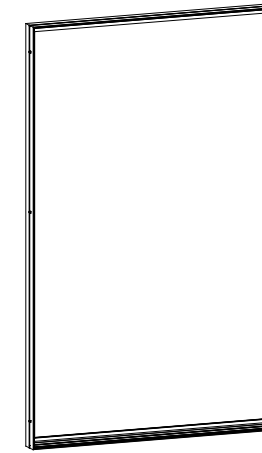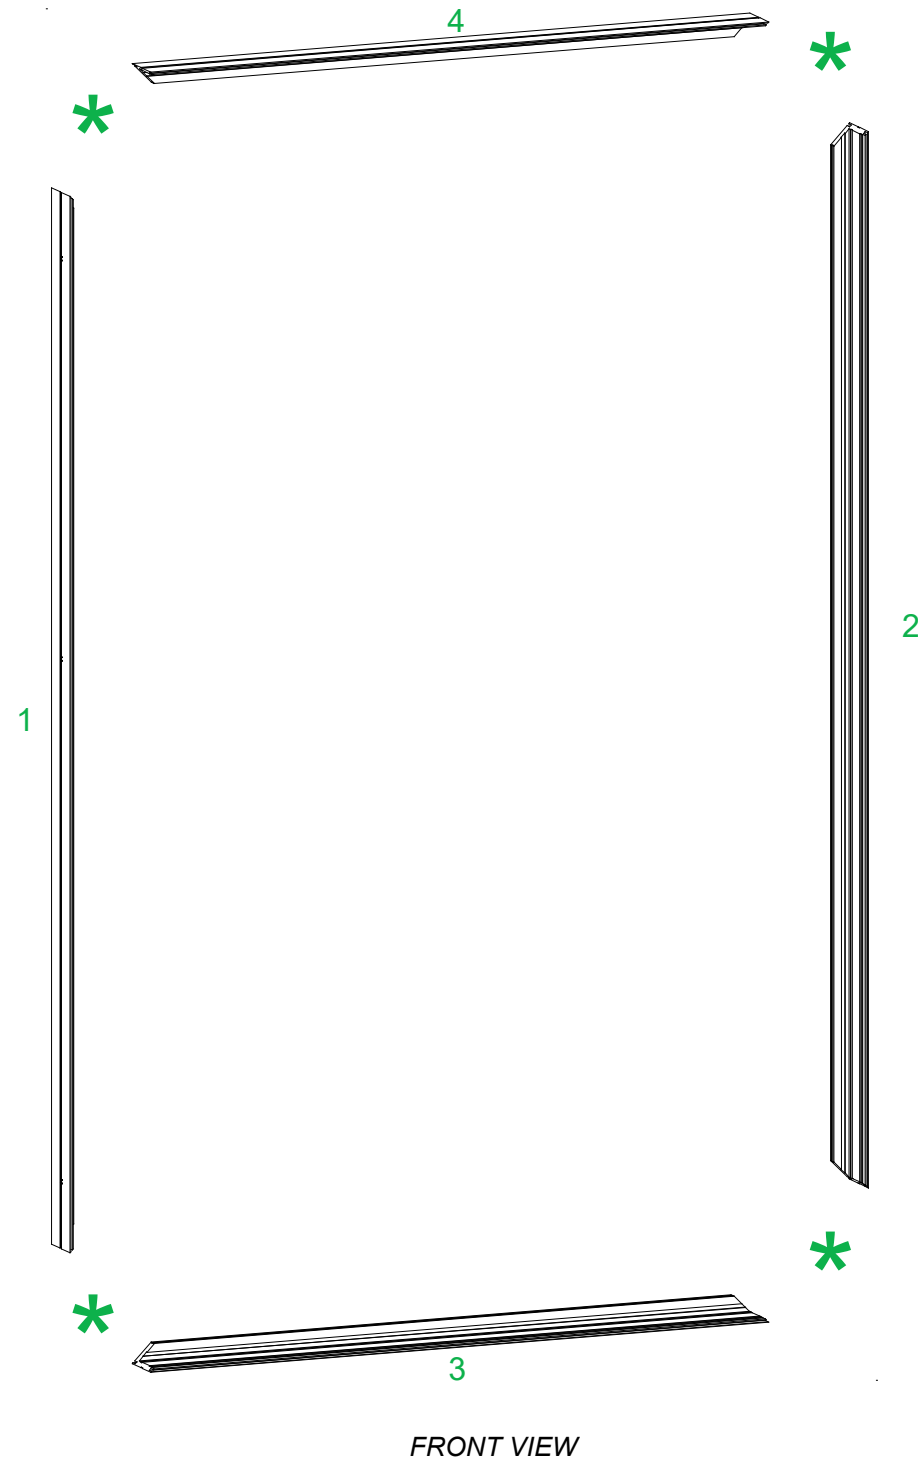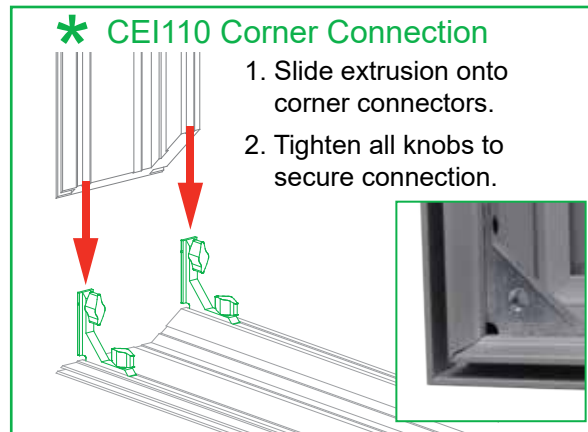


When assembled

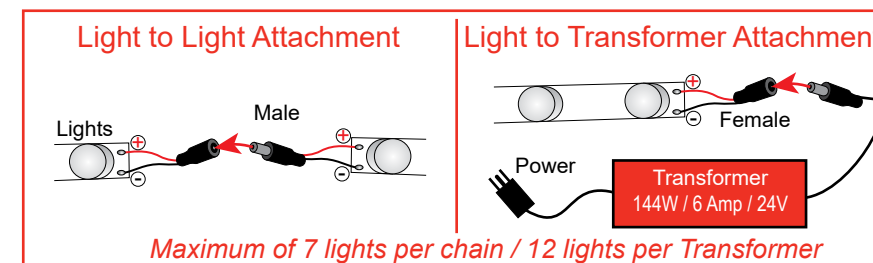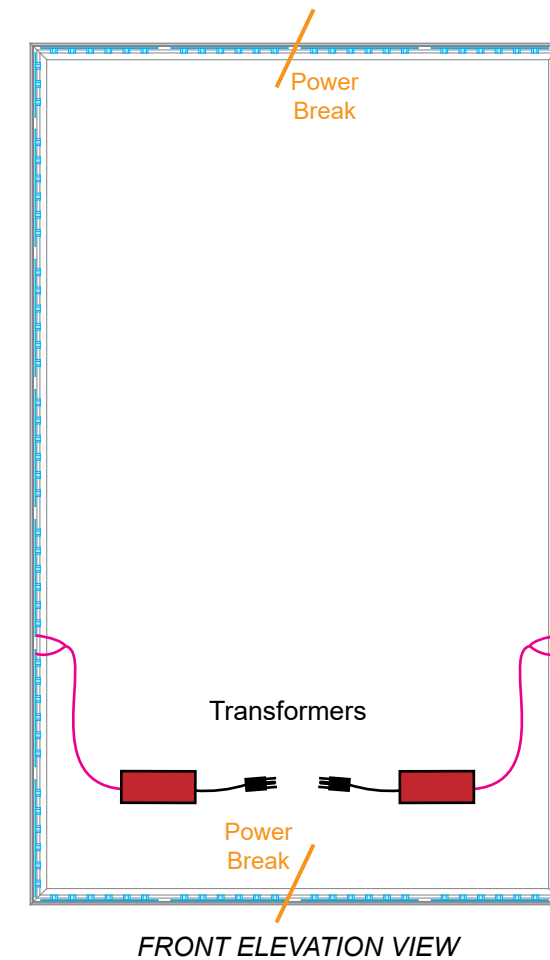


Item	Qty.	Description
--	3	4" x 2" x 2" custom L-Bracket

- Steps:
- 1) Apply SEG graphic to front of lightbox assembly [1/2/3/4]. Refer to the SEG Installation general information page.
 - 2) Attach lightbox vertical [2] to Panel [G] using brackets. See Bracket Attachment detail.

Note: Do not apply SEG blocker until lightbox frame is connected to left closet assembly. See following pages.

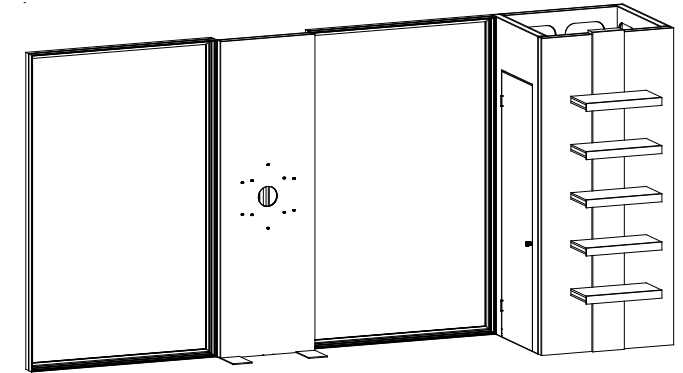

When assembled

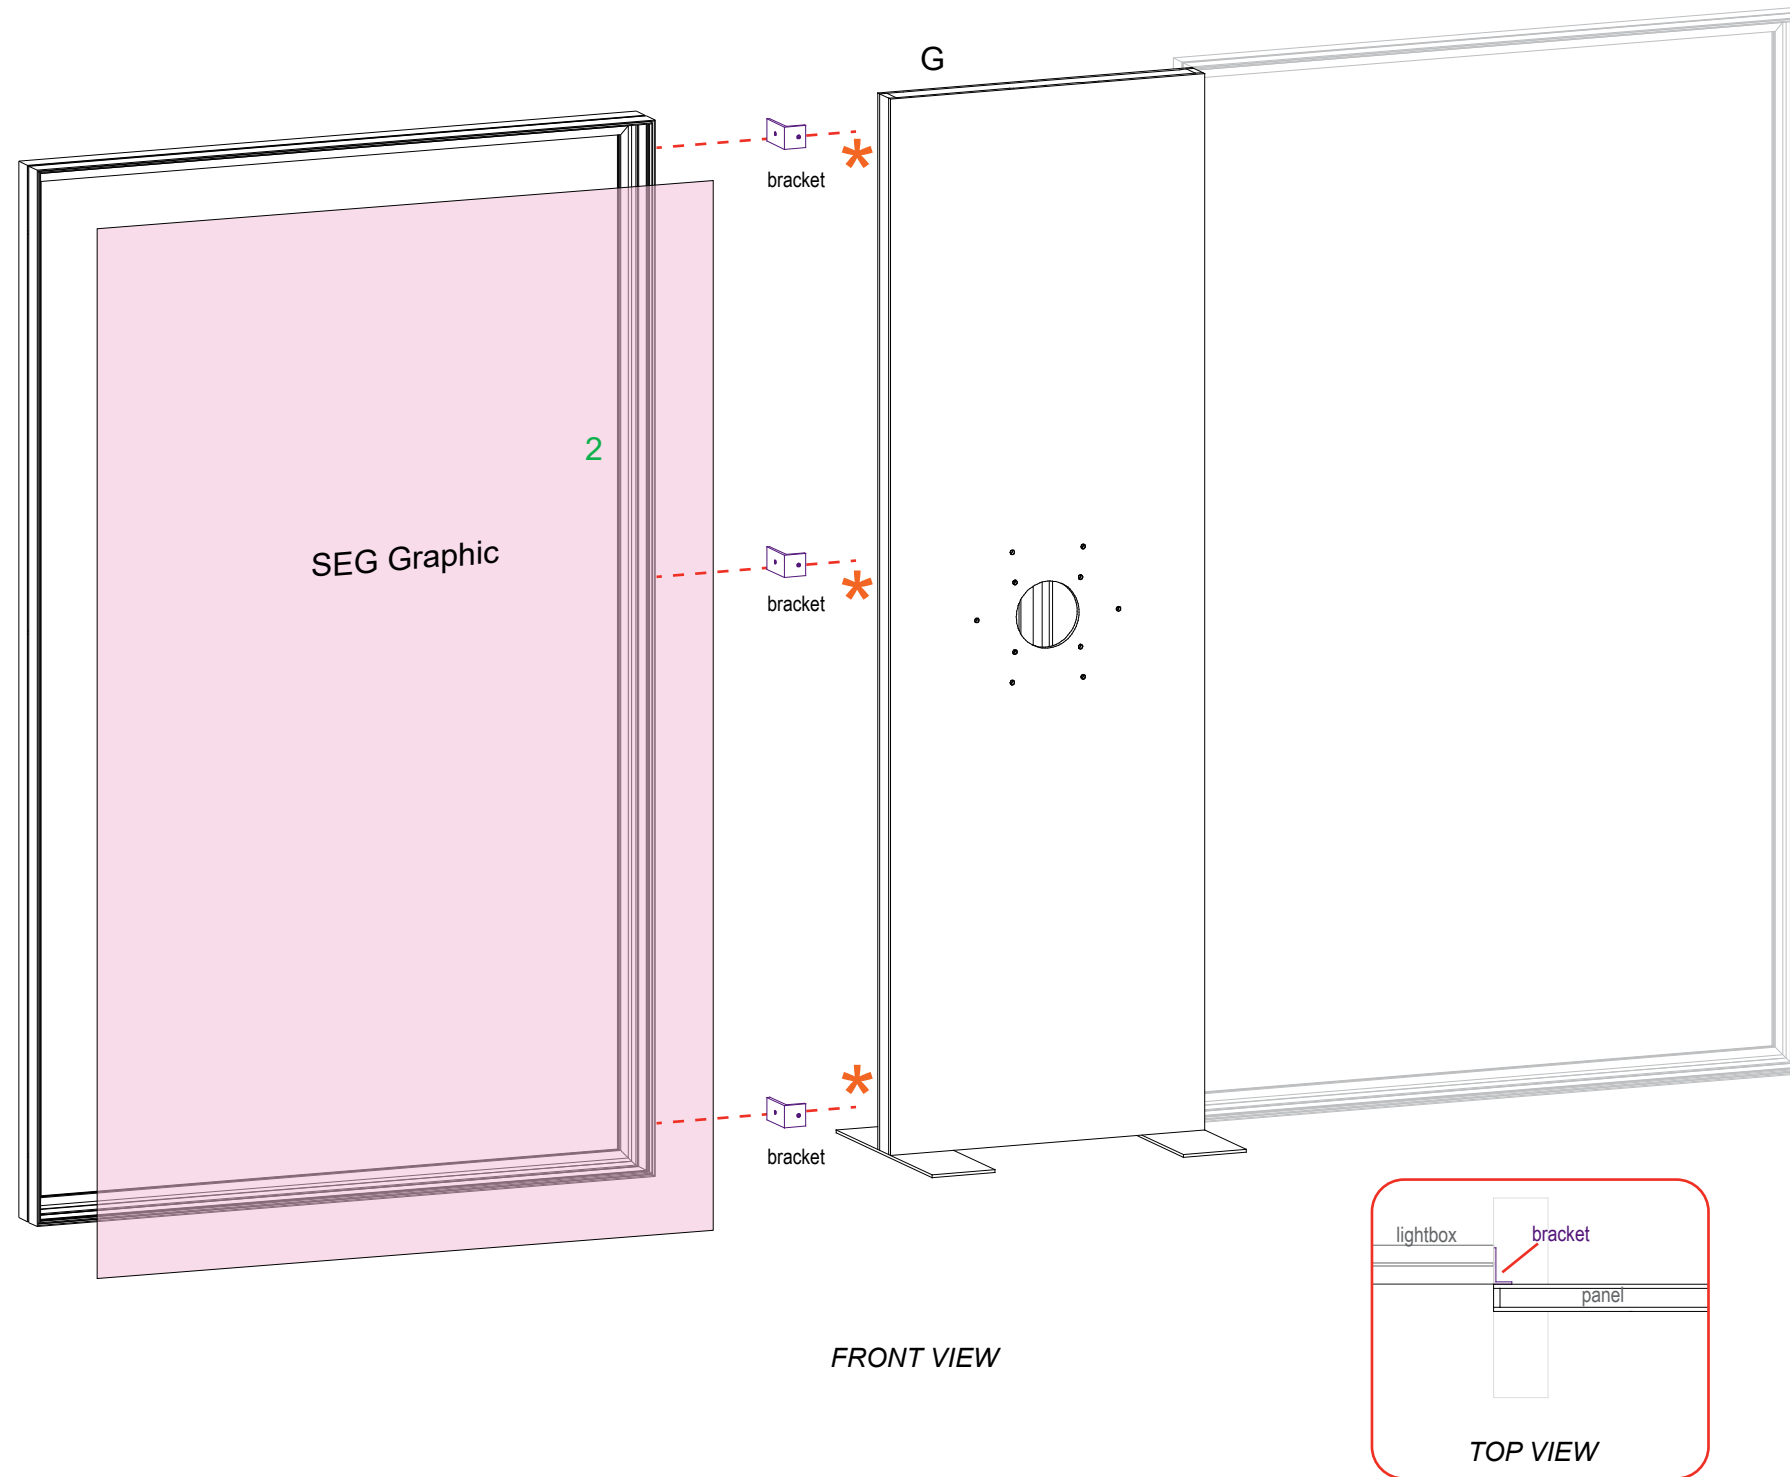

*** Bracket Attachment**

Attach bracket to back of wall panel using Bolt to T-Nut connection.

Bolt Set Screw V4 Connector

Slide V4 connector into groove of vertical extrusion; tighten set screw to secure V4 in place.


Panel V4 Bracket extrusion

BACK VIEW

Attach bracket to vertical extrusion using bolt.

Item	Qty.	Description
K1	1	36" w x 95" h x 3" d Back Panel
K2	1	36" w x 95" h x 3" d Side Panel
K3	1	36" w x 95" h x 3" d Side Panel w/ Door
K4	1	42" w x 95" h x 3" d Front Panel w/ accent

- Steps:
- 1) Assemble panels [K1-K2-K3-K4] together as shown, using roto cam locks. See [Roto Cam Lock Connection](#) detail.
 - 2) Connect lightbox vertical [1] to left closet panel [K3] using [Bolt to T-Nut Connection](#).
 - 3) Apply SEG Blocker to back of lightbox assembly. Refer to the [SEG Installation general information page](#).

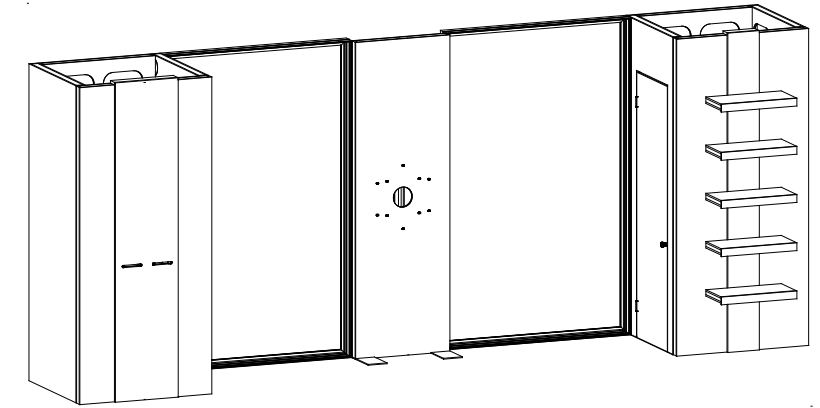

When assembled

*** Roto Cam Lock Connection**

Step 1



Step 2

Place hex tool in hole on side of panel. Rotate to activate lock & secure panels together.

*** Bolt to T-Nut Connection**



bolt

T-nut

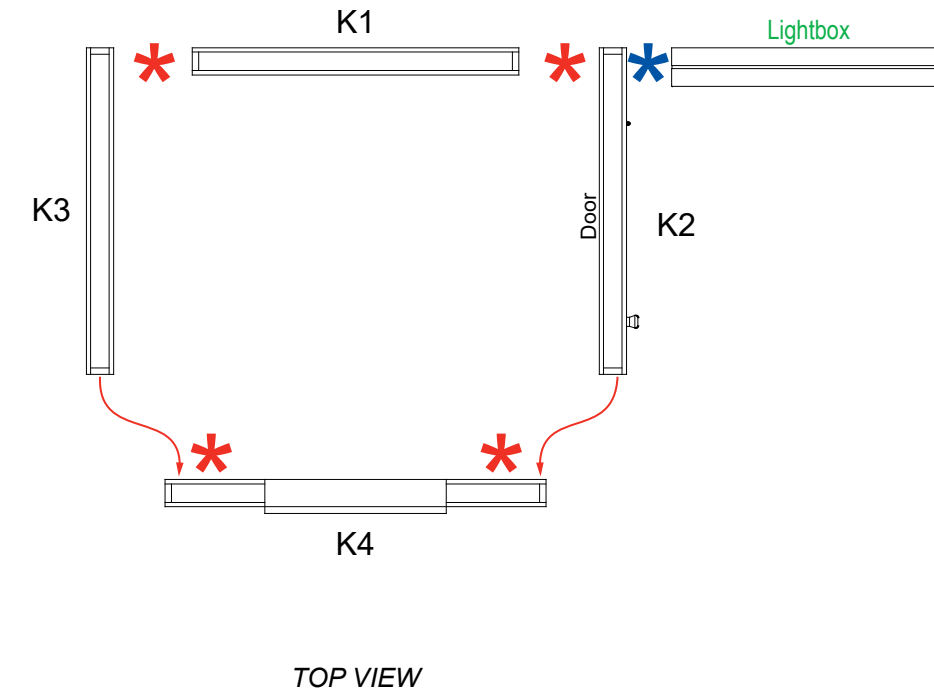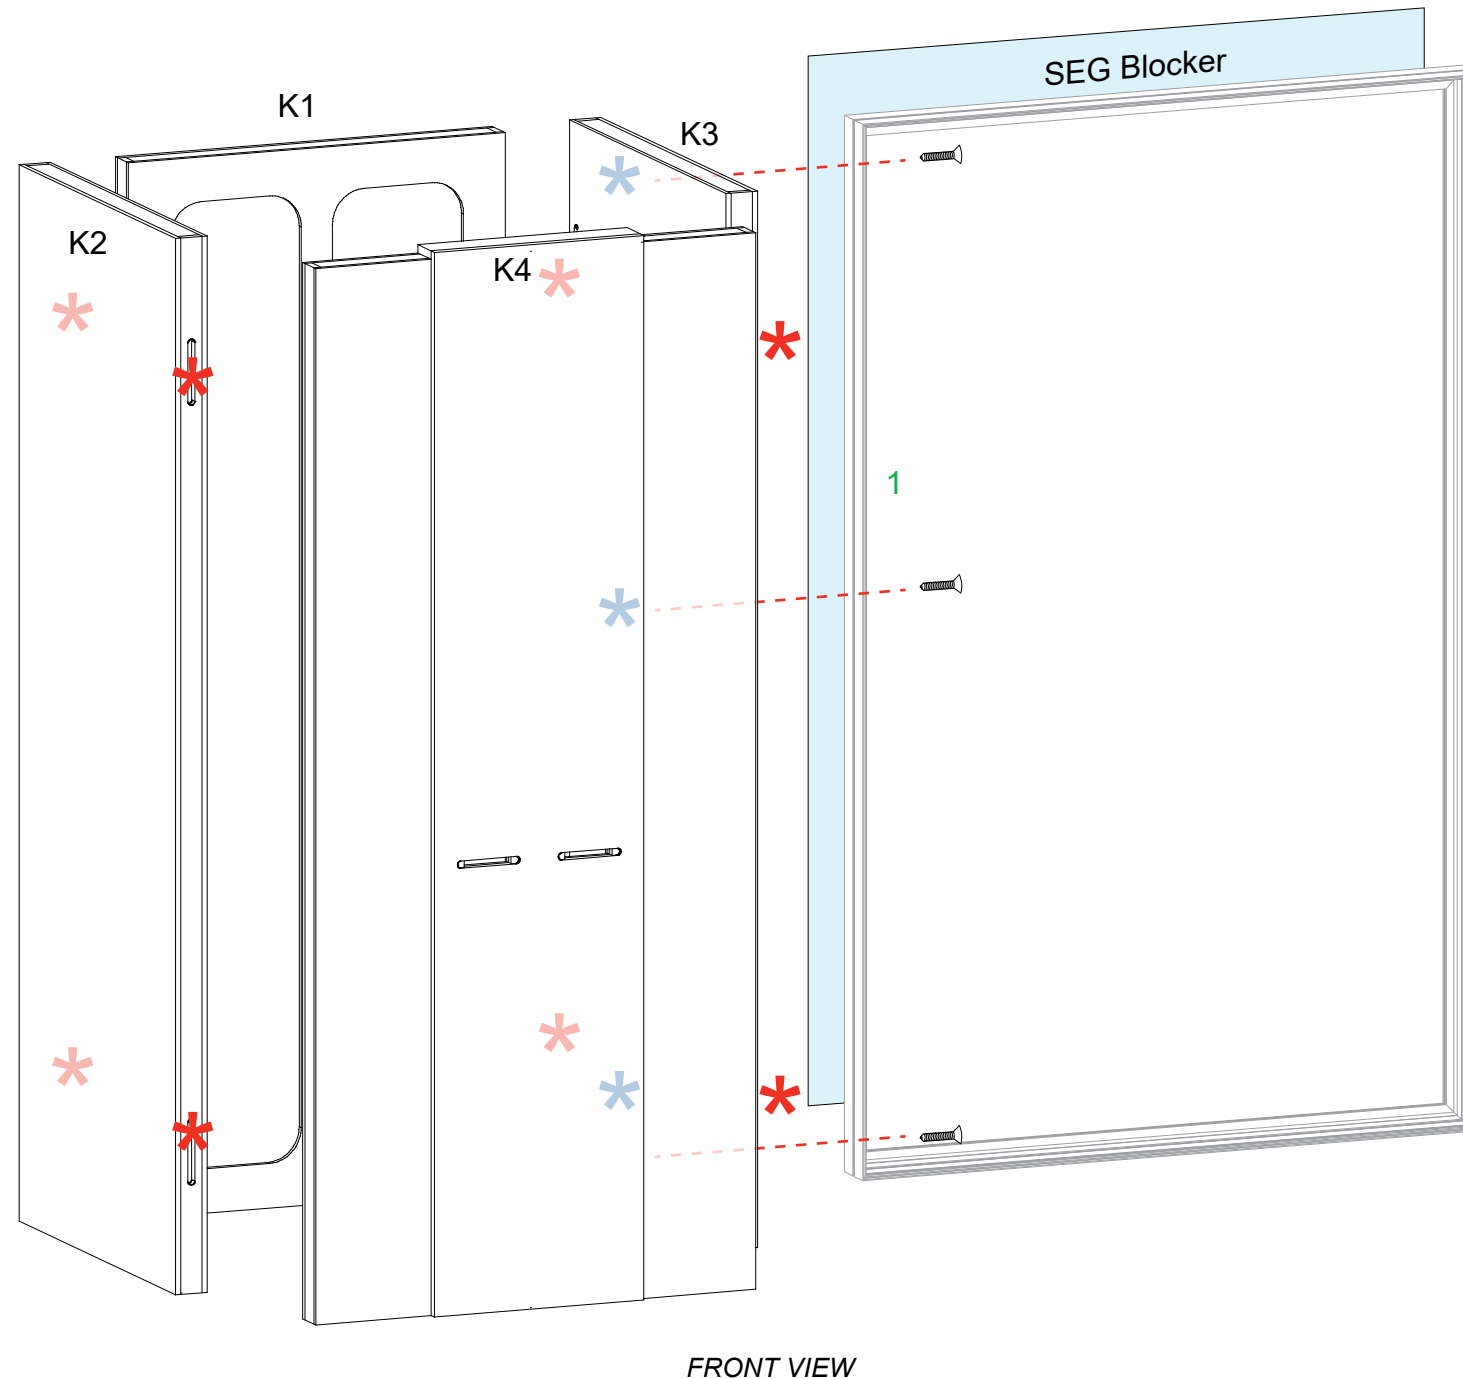

Item	Qty.	Description
M1	1	20"w x 70"l x 3"d Counter Top
M2	1	20"w x 39"h x 3"d Counter Leg

- Steps:
- 1) Connect Counter Top [M1] to Counter Leg [M2] using roto cam locks. See **Roto Cam Lock Connection** detail.
 - 2) Attach Counter Top [M1] to closet panel [K4] using **roto cam locks**.

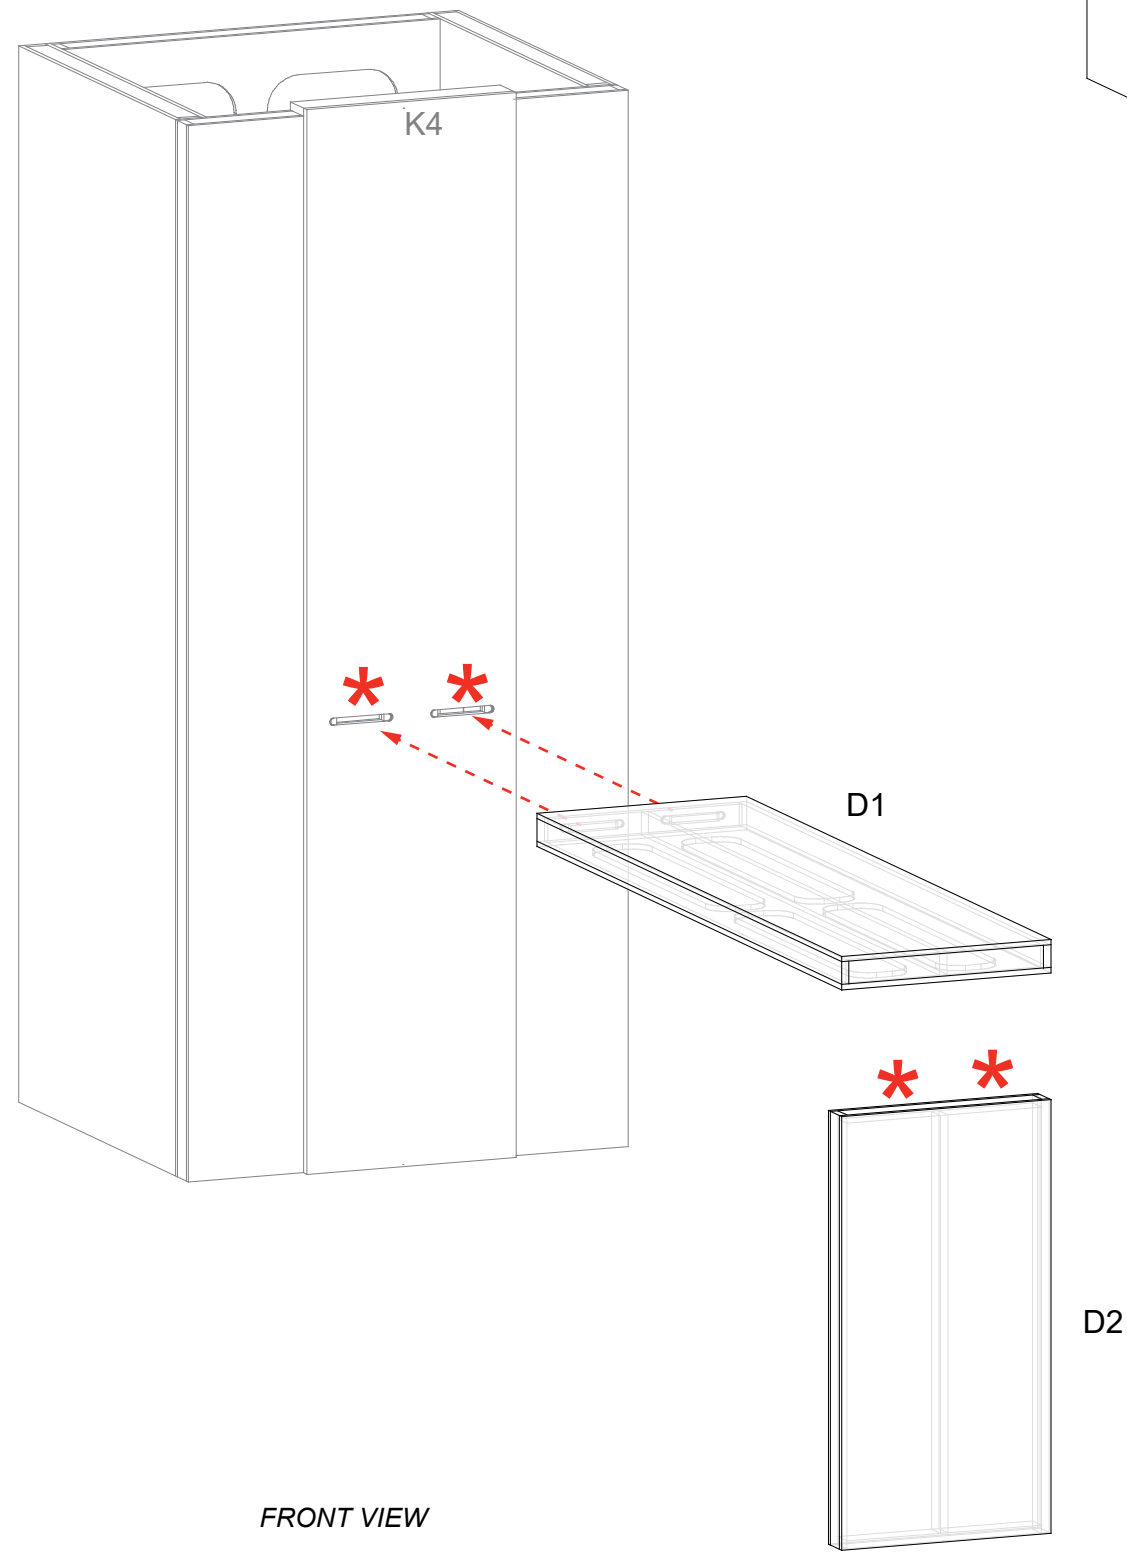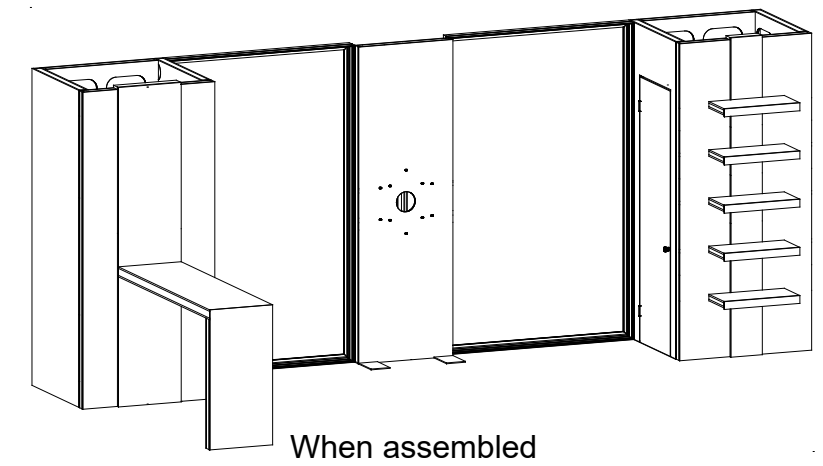

*** Roto Cam Lock Connection**

Step 1

Hex Key Tool
Hole


Step 2

Hex Key Tool
Lock

Place hex tool in hole on side of panel. Rotate to activate lock & secure panels together.


Item	Qty.	Description
--	1	Spinner Graphic
J	1	44.75" x 44" Pointer w/ LED lights
--	4	2.814" Standoff Barrel

1) Attach turntable & spacer to wall panel [G] using bolts.

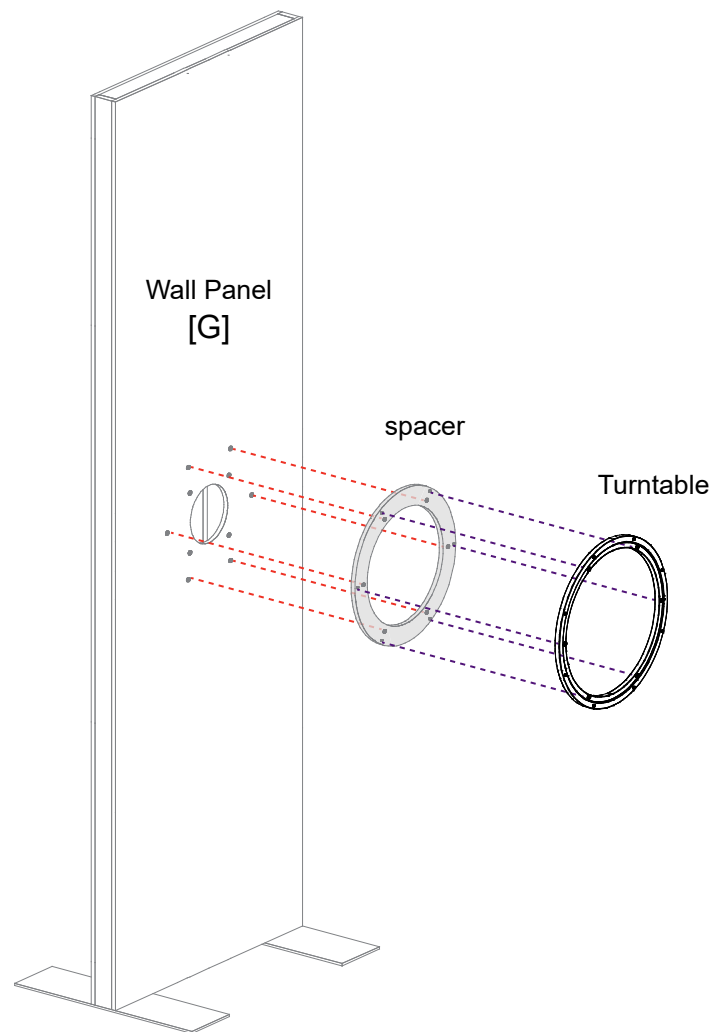


FRONT VIEW

2) Connect Spinner Graphic to turntable, using bolts from front. *Make sure graphic spins properly before attaching pointer in next step.*

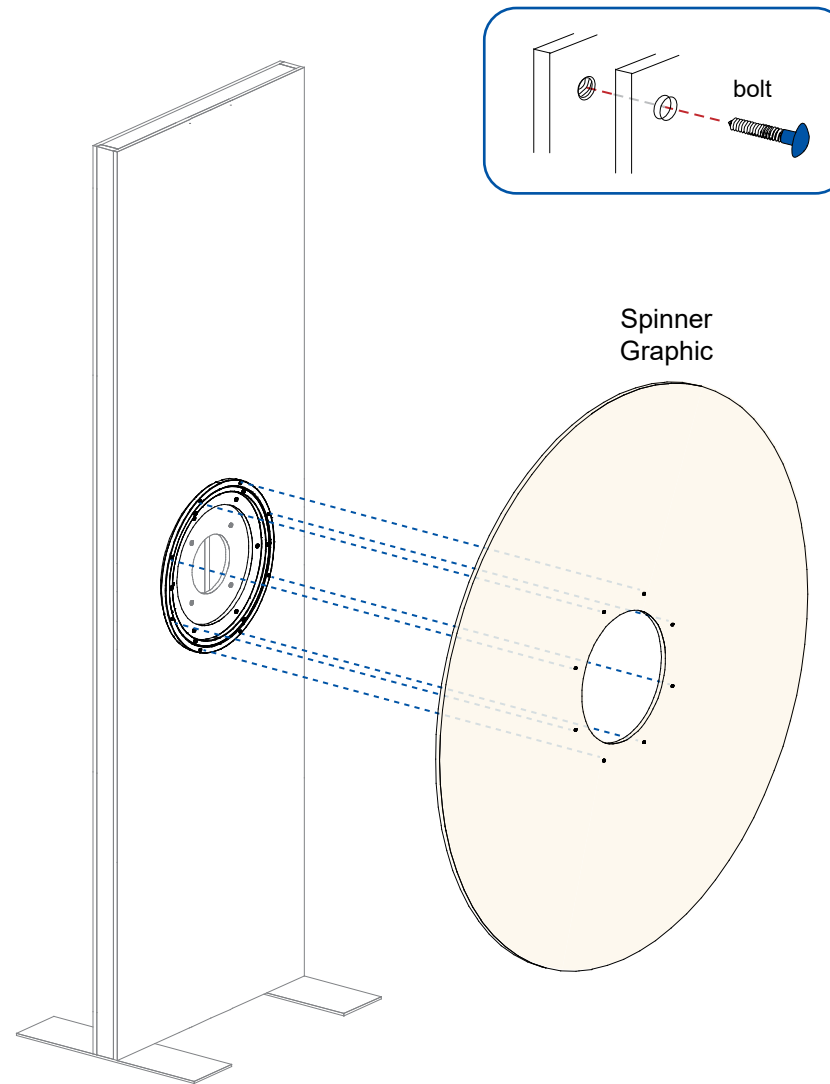

FRONT VIEW

3) Attach standoff barrels to T-nuts on back of Pointer panel [J]. Then connect standoffs to wall panel using bolts.
 4) Connect power cords to LED lights on back of Pointer panel [J]. Route cords through hole in wall panel.




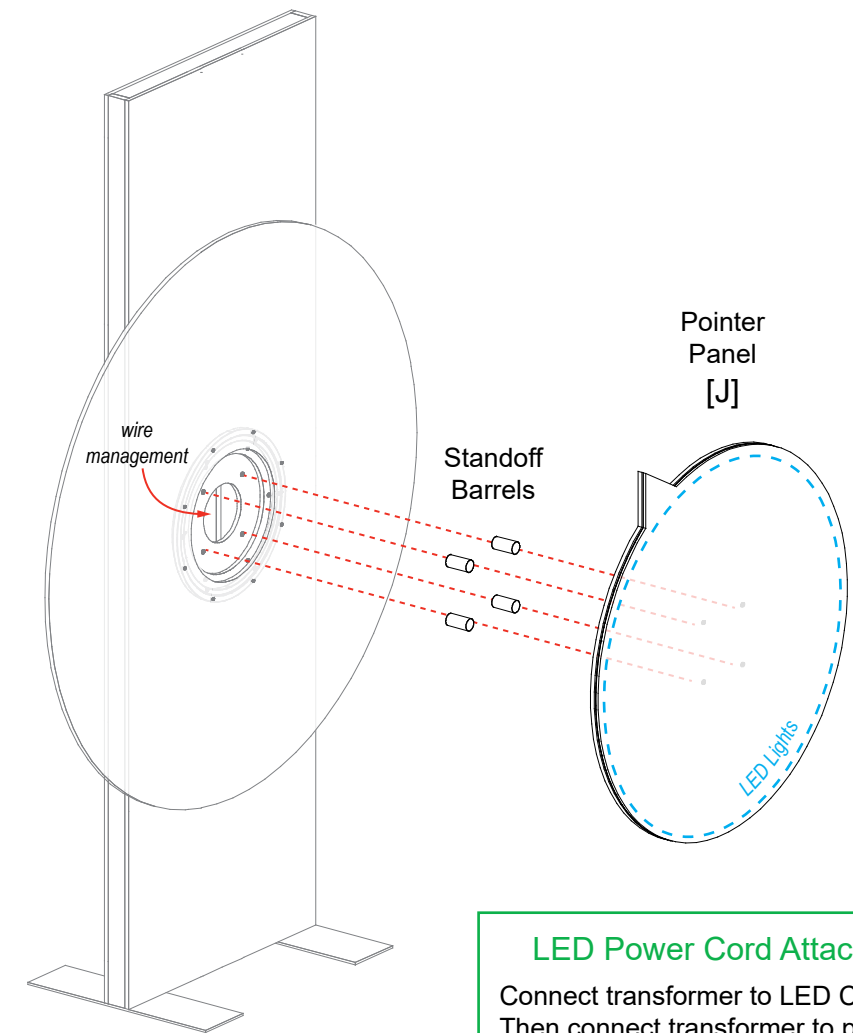


LED Power Cord Attachment

Connect transformer to LED Controller. Then connect transformer to power source.


Steps:

- 1) Connect power cords to Supernova lights as shown.
- 2) Apply SEG graphic to front of lightbox. Refer to the SEG Installation general information page.

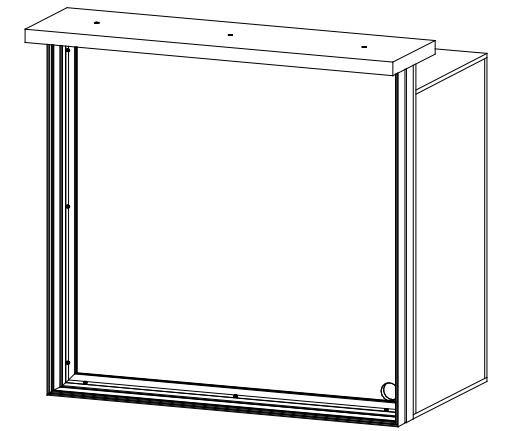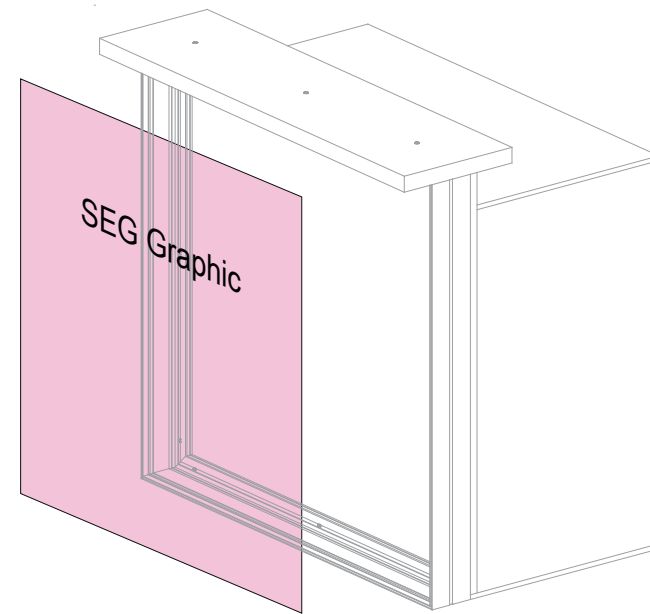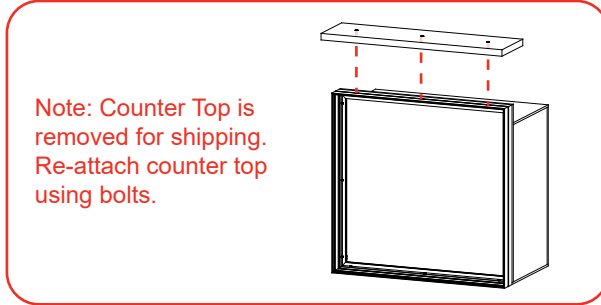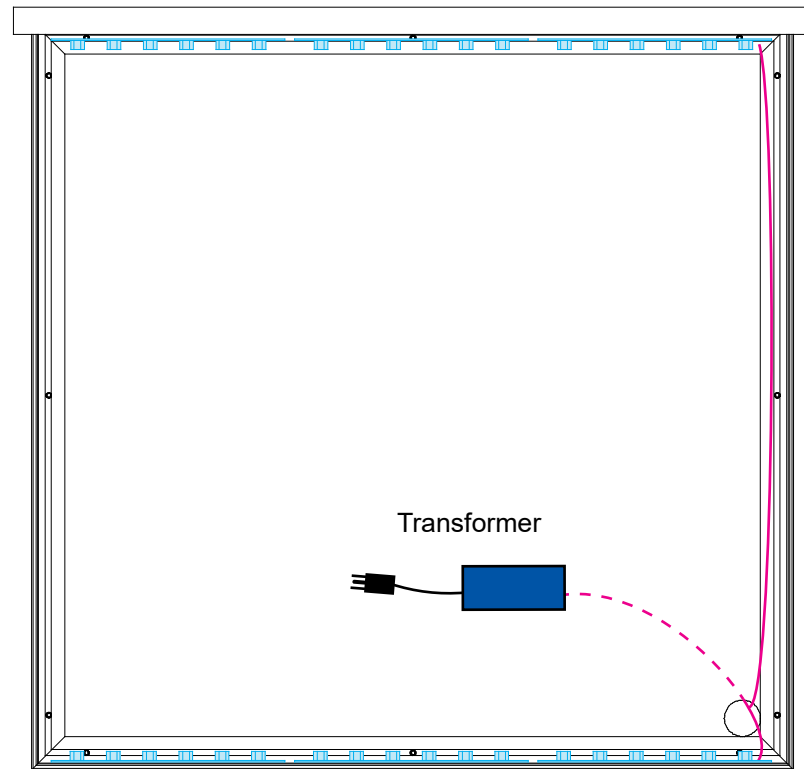

FRONT VIEW

When assembled

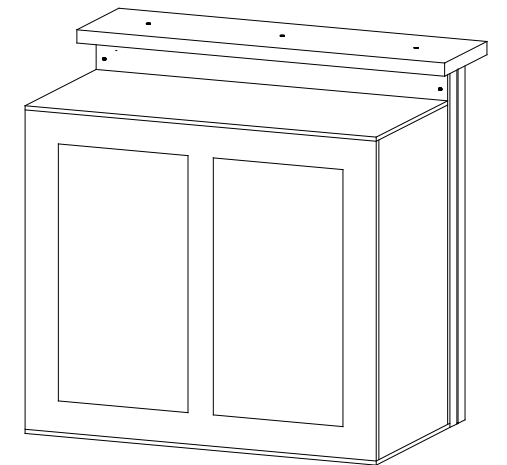

BACK VIEW

